




SNAP-TITE ATX

HIGH PRESSURE NITRILE RUBBER ATTACK/SUPPLY HOSE

Manufactured in a similar process as TPX, ATX utilizes a 3-ply design where the cover and liner are extruded independently and double vulcanized to guarantee a consistent, compact hose wall. The polyester reinforcement can then be woven tighter, making this hose more resistant to puncture while also being easier to pack and store. ATX has a stronger jacket which increases the service test pressure of the LDH sizes to 300 psi (2070 kPa). The Snap-tite ATX is highly resistant to both conductive and radiant heat.

FEATURES:

- 3-ply rubber municipal fire hose with both the cover and liner made of heavy duty nitrile rubber, high tensile strength tightly woven polyester reinforcement for maximum durability and flexibility.
- Smooth liner keeps friction loss to a minimum.
- Nitrile rubber cover greatly increases abrasion resistance, provides long service life and the tightly woven reinforcement resists puncture.
- Remains flexible to temperatures as low as -20°F (-29°C) and is resistant to ozone, oxidation and most chemicals and petrochemicals.
- Suitable for high pressure attack, supply and relay applications.
- Suitable for pumping to sprinklers and standpipes, industrial firefighting and supplying aerial devices.
- Manufactured in accordance with NFPA 1961 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

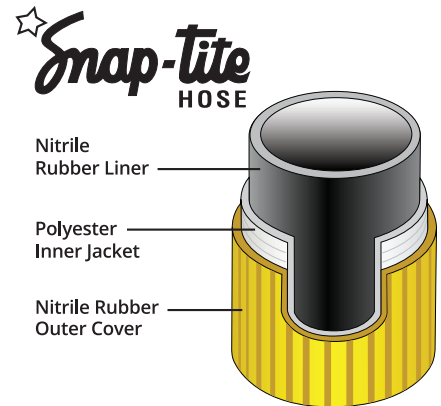

CONSTRUCTION

3-Ply Nitrile Rubber Cover/Liner
Polyester Reinforcement

TEMPERATURE RANGE

-20°F to 200°F (-29°C to 93°C)

COUPLINGS

Aluminum NH/NST or IPT Threaded & Aluminum Storz

COLORS



ATTACK



SUPPLY



SOFT SUCTION



USA MADE



KLEAN HOSE



HOSE SIZING AND SPECIFICATIONS

SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (FOR 50' COUPLED)	FLAT WIDTH	BOWL SIZE
IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	IN
4"	300 (2070)	600 (4140)	900 (6200)	50': 60 (27.2) 100': 114 (51.7)	7.00"	4 - 7/16"
5"	300 (2070)	600 (4140)	900 (6200)	50': 81 (36.7) 100': 154 (69.8)	8.75"	5 - 5/16"
6"	300 (2070)	600 (4140)	900 (6200)	102 (46.4)**	10.25"	6 - 1/2"

Coupled weights

**Weight uncoupled for 50' length.

As per NFPA 1961 - The service test pressure is to be 10% greater than the "normal highest operating pressure" at which the hose is expected to be used.

HOW TO ORDER

TYPE	HOSE ID	BY	HOSE LENGTH	COLOR	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
ATX	40 = 4" 50 = 5" 60 = 6"	X	50 = 50' 100 = 100'	Y = Yellow R = Red O = Orange	40 = 4" 50 = 5" 60 = 6"	N = NH I = IPT S = Storz	Aluminum

Part No. Example: ATX40X50YM40S = ATX Hose, 4" ID by 50' Length, Yellow, 4" Storz Aluminum Coupling



SNAP-TITE LD

LIGHTWEIGHT EXTRUDED RUBBER HOSE

LD is a premium quality, nitrile rubber covered fire hose that is manufactured using a unique process which permanently bonds the nylon reinforcement to the nitrile rubber cover/liner. LD is an easily coiled, non-kinking, high flow, lightweight hose that also resists abrasion, chemicals, and weathering by ozone.



ATTACK



HIGH-RISE



USA MADE



KLEAN HOSE



LIFETIME
AGAINST
DELAMINATION
WARRANTY



UL/ULC LISTED

FEATURES:

- Extruded thru-the-weave, nitrile rubber fire hose. The reinforcement is made with circular woven, twill weave, nylon fibers.
- Highly resistant to both conductive and radiant heat.
- Designed using an external elastomeric coating that provides very low absorption of liquids.
- Hose remains flexible to temperatures as low as -5F (-20C) and is resistant to ozone, oxidation, and most chemicals and petrochemicals.
- Maintenance free, no drying required, and is easily cleaned.
- Manufactured in accordance with NFPA 1961 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

HOSE SIZING AND SPECIFICATIONS

SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (FOR 50' COUPLED)	BOWL SIZE	CERTIFICATION AVAILABLE
IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	
1"	300 (2070)	600 (4140)	900 (6200)	7 (3.2)	1 - 3/16"	
1 1/2"	300 (2070)	600 (4140)	900 (6200)	10 (4.5)	1 - 13/16"	
1 3/4"	300 (2070)	600 (4140)	900 (6200)	13 (5.9)	2 - 1/16"	
2"	300 (2070)	600 (4140)	900 (6200)	15 (6.8)	2 - 5/16"	
2 1/2"	300 (2070)	600 (4140)	900 (6200)	19 (8.6)	2 - 13/16"	UL, ULC
2 3/4"	250 (1725)	500 (3450)	770 (5310)	21 (9.5)	N/A	
3 1/2"	200 (1379)	400 (2758)	600 (4137)	24 (10.9)	N/A	


As per NFPA 1961 - The service test pressure is to be 10% greater than the "normal highest operating pressure" at which the hose is expected to be used.

HOW TO ORDER

TYPE	HOSE ID	BY	HOSE LENGTH	COLOR	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
LD	10 = 1" 15 = 1 - 1/2" 17 = 1 - 3/4" 20 = 2" 25 = 2 1/2"	X	50 = 50' 75 = 75' 100 = 100'	Y = Yellow R = Red B = Blue	10 = 1" 15 = 1 1/2" 20 = 2" 25 = 2 1/2"	N = NH I = IPT BW = British Instantaneous	Blank = Aluminum BR = Brass Rocker Lug BP = Brass Pin Lug G = Gunmetal (BW Thread ONLY)

Part No. Example: **LD17X50R15NBR** = LD Hose, 1-3/4" ID by 50' Length, Red, 1-1/2" NS/NST Brass Rocker Lug Coupling

Snap-Tite
HOSE
Nylon Fabric
Reinforcement



Nitrile Rubber
Thru-the-Weave

CONSTRUCTION

Nitrile Rubber Cover
Liner with Nylon
Reinforcements

TEMPERATURE RANGE

-20 degrees to 200 degrees F (-29C to 95C)

COUPLINGS

Aluminum or brass NH/NST or IPT
Threaded,
Aluminum Storz

COLORS

