



**ATTACK**



**LOW PSI**



**CAFS**



**USA MADE**

# PONN GLADIATOR™

**PREMIUM HOSE. EXCELLENT FLOW, EVEN AT LOW PRESSURE.**

Another great addition to the Ponn family, the Gladiator is a premier hose which has a polyester outside jacket that encompasses a very durable nitrile-thru-the-weave inside liner. Built to last, the rugged hose is constructed with incredible strength and long-lasting performance in mind. The Gladiator performs well at high or low pressures, has a smooth and enhanced waterway for better flows and less kinking than other products on the market.

## FEATURES


- Premium quality, outside jacket with a nitrile thru-the-weave inner tube construction.
- Optional Dura-Cote™ treatment (see page 31 for more information).
- Remains flexible to temperatures as low as -20°F (-29°C) and is resistant to ozone and oxidation.
- Kink resistance exceeds that of lightweight jacketed hose.
- Suitable for use with CAFS and foam solutions.
- Manufactured in accordance with NFPA 1961 Standard, latest edition within our ISO-9001:2015 certified quality assurance system.

## CONSTRUCTION

Polyester Outside Jacket  
Extruded Nitrile Inner Liner  
(Thru-the-Weave)

## TEMPERATURE RANGE

-20°F to 200°F (-29°C to 95°C)

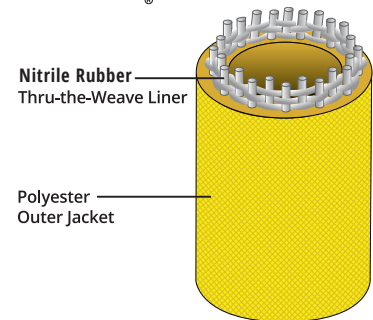

Nitrile Rubber  
Thru-the-Weave Liner

Polyester  
Outer Jacket

## COUPLINGS

Aluminum NH/NST or IPT Threaded

## HOSE COLORS





### HOSE SIZING AND SPECIFICATIONS

SIZE	SERVICE TEST	PROOF TEST	BURST	WEIGHT (FOR 50' COUPLED)	FLAT WIDTH	BOWL SIZE
IN	PSI (kPa)	PSI (kPa)	PSI (kPa)	LBS (KG)	IN	IN
1 3/4"	500 (3447)	1000 (6895)	1500 (10342)	23 (10.4)	3.38"	2 - 3/16"
2"	500 (3447)	1000 (6895)	1500 (10342)	26 (11.8)	3.50"	2 - 5/16"
2 1/2"	500 (3447)	1000 (6895)	1500 (10342)	35 (15.9)	4.30"	2 - 7/8"

As per NFPA 1961 – The service test pressure is to be 10% greater than the “normal highest operating pressure” at which the hose is expected to be used.

### HOW TO ORDER

TYPE	HOSE ID	BY	HOSE LENGTH	COLOR	COUPLING SIZE	THREAD TYPE	COUPLING MATERIAL
FG	17 = 1 3/4" 20 = 2" 25 = 2 1/2"	X	50 = 50' 100 = 100'	Y = Yellow R = Red B = Blue O = Orange G = Green T = Tan C = White (coated)	15 = 1 1/2" 20 = 2" 25 = 2 1/2"	N = NH I = IPT	Aluminum

**Part No. Example: FG17X50Y15N** = FG Gladiator Hose, 1 3/4" ID by 50' Length, Yellow, 1 1/2" NH/NST Aluminum Coupling